


Quad Systems, LLC

ES-500 Control to Horton S4000 & S7000 Operators

1. Disconnect Harness from latch check micro switch (blue and grey wires)
2. Install white wire into micro switch housing. See below

MICRO SWITCH HOOK-UP

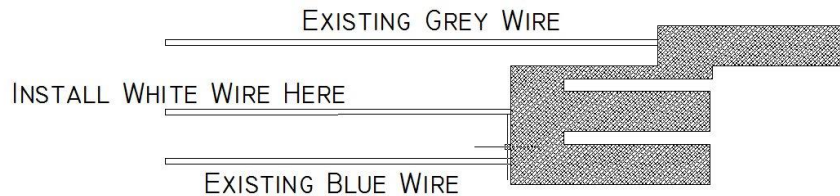


3. Reinstall harness on latch check micro switch.
 4. Remove "Close Speed Pot." from unit and discard.
 5. Disconnect motor wires and reconnect to new harness (note wire color connections)
 6. Plug in harness
 7. Set up the ES-500 control as per the instructions provided by vender.
-

Quad Systems, LLC

ES-500 Control to Horton S4000 & S7000 Operators

1. Disconnect Harness from latch check micro switch (blue and grey wires)
2. Install white wire into micro switch housing. See below

MICRO SWITCH HOOK-UP

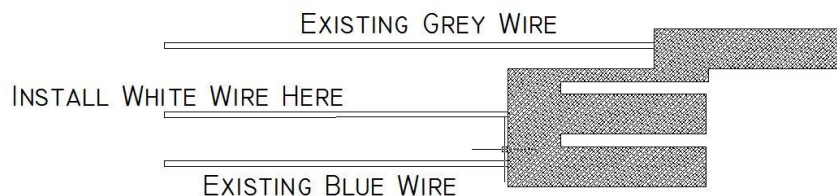

3. Reinstall harness on latch check micro switch.
 4. Remove "Close Speed Pot." from unit and discard.
 5. Disconnect motor wires and reconnect to new harness (note wire color connections)
 6. Plug in harness
 7. Set up the ES-500 control as per the instructions provided by vender.
-